


| AE Product                 | Description                                    | Application Times                                                  | Notes                                      | PLIOGRIP<br>by Valvoline                | 3M<br>Automix                          | Lord Fusor                 | SEM Products          | Norton<br>Speedgrip | IES                | Polymix                      |
|----------------------------|------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------|-----------------------------------------|----------------------------------------|----------------------------|-----------------------|---------------------|--------------------|------------------------------|
| PLASTIC REPAIR             |                                                |                                                                    |                                            |                                         |                                        |                            |                       |                     |                    |                              |
| AE303                      | Plastic Bonder<br>50 mL and 210 mL             | Work: 20 – 40 seconds<br>Sand: 3 – 7 minutes                       | 2k Polyurethane<br>(3 min plastic repair)  | Plastic Repair 3                        | 05891 / 05896                          | 152 / 153                  | 39927                 | 04615 / 04616       | 8440 / 8409        | P2.3003.200                  |
| AE303                      | Plastic Bonder<br>50 mL and 210 mL             | Work: 20 – 40 seconds<br>Sand: 3 – 7 minutes                       | 2k Polyurethane<br>(tab repair)            | Rapid Repair                            | 04247 / 04747<br>04248 / 08237         | 141 / 140                  | 40207                 | 04647               | 8440 / 8409        | P2.3001.200 /<br>P2.3004.200 |
| AE7010                     | Plastic Bonder<br>50 mL and 210 mL             | Work: 60 – 90 seconds<br>Sand: 7 – 15 minutes                      | 2k Polyurethane<br>(70 sec plastic repair) | Plastic Repair 1                        | 04240 / 08239<br>08243 / 08270 / 08271 | 142 / 141<br>132 / 133     | 40507                 | 04615 / 04647       | 8642 / 8643        | P2.3002.200 /<br>P2.5005.200 |
| AE250                      | Easy Sand<br>Limited Flow<br>210 mL            | Work: 5 – 10 min. at 70°F/21°C<br>Sand: 10 – 20 min. at 70°F/21°C  | 2k Epoxy<br>(cosmetic skim coat)           | Finishing Cream 3<br>Finishing Cream 10 | 05887 / 35887 / 55887                  | 114                        | 39458                 | 06412               | 8080 / 8480 / 8680 | P2.5001.200                  |
| SMC REPAIR & PANEL BONDING |                                                |                                                                    |                                            |                                         |                                        |                            |                       |                     |                    |                              |
| AE250                      | Easy Sand<br>Limited Flow<br>210 mL            | Work: 5 – 10 min. at 70°F/21°C<br>Sand: 10 – 20 min. at 70°F/21°C  | 2k Epoxy<br>(cosmetic skim coat)           | Finishing Cream 3<br>Finishing Cream 10 | 05885 / 05887 / 08275                  | 102 / 103                  | 39458 / 39777         | 06412               | 8080 / 8480 / 8680 | P2.5001.200                  |
| AE260PB                    | 2:1 Panel Bonding<br>Adhesive<br>210 mL        | Set: 60 – 90 min. at 70°F/21°C                                     | 2k Epoxy<br>(slow set)                     | Panel 60, Panel 90                      | 08115 / 08116 / 08274                  | 108B / 109B<br>112B / 113B | 39537 / 39747         | 06421               | 8422               | P2.6001.200 /<br>P2.6002.200 |
| SEAM SEALERS               |                                                |                                                                    |                                            |                                         |                                        |                            |                       |                     |                    |                              |
| AE215SS                    | Flexible Limited<br>Flow Seam Sealer<br>210 mL | Work: 5 – 10 min. at 70°F/21°C<br>Sand: 10 – 20 min. at 70°F/21°C  | 2k Epoxy<br>(fast set) Gray                |                                         | 08306 / 08308 / 08310                  | 123, 126                   | 39370                 | 06402 / 97120       | 8413 / 8613        | P2.3005.200                  |
| AE230SS                    | Limited Flow<br>Seam Sealer<br>210 mL          | Work: 15 – 20 min. at 70°F/21°C<br>Sand: 20 – 30 min. at 70°F/21°C | 2k Epoxy<br>(medium set) Gray              | High Body<br>Seam Sealer 12             | 08308 / 08310<br>08323 / 08329         | 123EZ / 126EZ              | 39377 / 39477 / 40377 | 06398               | 8411 / 8611        | P2.5005.200 /<br>P2.5006.200 |

NEXT GENERATION  
PORT-TO-PORT SYSTEM

Unlike traditional cartridges, our innovative design features two completely separate material paths. Zero crossover, 100% reliability.

- No contamination
- Less waste
- Longer cartridge life
- Consistent mixing performance every time

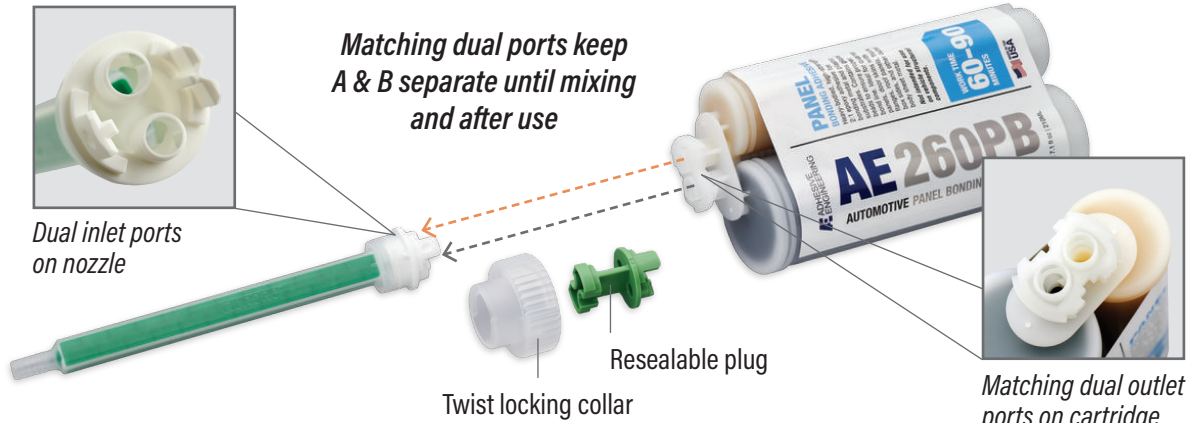

The AE Next Generation Port-to-Port System  
is available in both 50 mL and 210 mL sizes